


# AI Prompt Enhancer API **v1.0.0** API Results

An API that transforms basic prompts into optimized, context-rich instructions for AI language models. Works with both Mistral and OpenAI to enhance prompts and generate better AI responses.

🌐 <https://prompt-enhancer.ai/v1>

➡ 8 endpoints

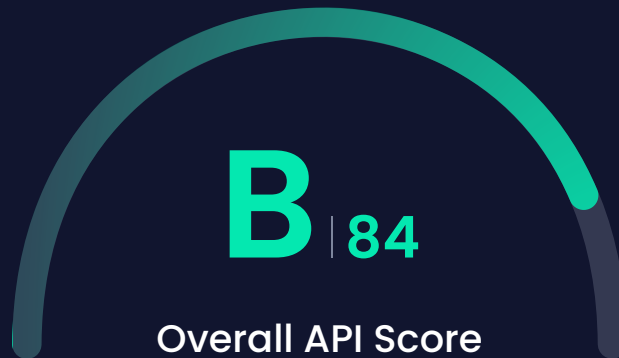

AI Ready

✅ 0 Issues

**A**

100

Design

⚠ 2 Issues

**B**

86

Performance

⚠ 2 Issues

**D**

68

Security

⚠ 2 Issues

**B**

84



## AI Ready

Pass

### Operation ID

Checks if each operation has an id

Pass

### Schema Types or Descriptions

Checks if each schema has descriptions or types

Pass

### Response Descriptions

Checks if each response has descriptions

Pass

### Parameter Descriptions

Checks if each parameter has descriptions



## Design

---

Fail

### JSON Support

When designing APIs that send and receive JSON data, you should always declare the `content-type` header as `application/json`. This test checks to make sure the `content-type` header is `application/json`.

---

Fail

### Consistent Pluralization

The base API endpoint provides the location of a group of resources (nouns). Therefore, your base endpoints should be described as plural nouns. For example: `/users` vs. `/user`

---

Pass

### Multiple HTTP Methods

A robust API should be designed methodically, allowing users to perform multiple functions. This test checks if your schema describes more than just GET response methods.

---

Pass

### Versioning

Good API design provides a way manage changes that is transparent to API consumers and other API producers. We recommend using url-based versioning, either `v` or `V` followed by a number (`/v2`) or numeric based (`/1`).

---

Pass

### Contact Information

Checks for presence of contact name, email, or URL.

---

Pass

### Information Description

Check to ensure all operations contain either a description or summary.

---

Pass

### Robust Responses

A robust API will return response codes that help users understand what happened, even when the response is successful. This test checks to ensure your schema describes more than just (200) `HTTP_OK` responses.

---

Pass

### Rate Limiting

Rate limiting is crucial for API security as it helps prevent abusive or malicious behavior by limiting the number of requests a client can make within a specified time. It mitigates the risk of unauthorized access, DDoS attacks, and resource exhaustion, ensuring fair and controlled usage of API resources while maintaining system stability and security. This test checks for the `x-ratelimit-limit` or `x-rate-limit` headers in the response payload to see if you use rate limiting.

---

Pass

### Operation Descriptions or Summaries

All operations must contain either a description or summary

---

Pass

### Unused Models

Checks for the presence of data models defined but not used.

---

Pass

### Examples Exist

Checks for presence of value or externalValue for examples.

---

Pass

### Consistent Noun Usage

API functionality is defined by the HTTP verb (method) and convey actions or a state of a resource (noun). Therefore, your endpoints should be described as nouns instead of verbs. For example: POST method for endpoint `/user/{id}` vs. `/postUser/{id}`



## Performance

---

Fail

### Compression Support

Compression speeds up the transmission of data and reduces packet loss. This test checks to see if compression content-encoding header exists.

---

Fail

### CDN Usage

Checks the base URL of the first entry in the servers section for responses of common CDN suppliers.

---

Skipped

### Response size

Checks if size of response is less than 100KB.

---

Pass

### HTTP2 Usage

Checks the base URL of the first entry in the servers section for version of the HTTP server.

---

Pass

### Load Time

Load time is the time it takes for an API to process a request and return a response. While several factors affect load time, users expect a response in 500ms or less. This test checks for load times of API responses.

---

Pass

### Cache Support

The cache-control header is used to specify browser caching policies, including how a resource is cached, where it is cached, and its expiration.



## Security

Fail

### iFrame Embedding

The X-Frame-Options header indicates whether a browser can render a page in a `<frame>` or `<iframe>`. If not set to DENY, sites can manipulate user's activity via clickjacking attacks. This test checks if the X-Frame-Options header exists and its value is set to DENY.

Fail

### Insecure Direct Object Reference (IDOR) Risks

Checks for Insecure Direct Object Reference (IDOR) risks which can allow malicious users to access or modify objects by manipulating identifiers used in the API parameters. This test checks each path parameter's definition: they must be of type string and format UUID or type string with a valid UUID/ULID/Mongo ObjectID example present.

Pass

### Secure URLs (HTTPS)

Good API design ensures that all data is transferred via an encrypted protocol. This test checks whether requests require HTTPS.

Pass

### Strict Transport Security

The Strict-Transport-Security (HSTS) header is crucial for enforcing secure communication over HTTPS. When a server includes the HSTS header in its response, it instructs the browser to always connect to the API using HTTPS, even if the user enters an HTTP URL. This prevents potential downgrade attacks and ensures that all communication remains encrypted. This test checks for the Strict-Transport-Security header in your API responses.

Pass

### Operation Enforces Security Scheme

Checks to ensure operation security field is defined. If not anyone can access the API without any authentication.

Pass

### Content Type Options

The X-Content-Type-Options header plays a vital role in protecting the API from MIME sniffing attacks. By setting the value of this header to nosniff, it instructs the browser to strictly adhere to the declared Content-Type and prevents it from attempting to sniff or interpret the response data based on its content. This test checks to see if the X-Content-Type-Options header exists and if its value is set to nosniff.

Pass

### Global Security Field is Defined

Checks if security field is defined

Pass

### Content Security Policy

The Content-Security-Policy header allows you to restrict which resources can be loaded and what URLs they can be loaded from. This test checks to see if the Content-Security-Policy header exists.

---

Pass

### Authorization

API Authorization is crucial for ensuring secure access and protecting sensitive data. This tests checks to ensure the `securitySchemes` object is present and is not empty.

---

Pass

### Security Field Contains a Scheme

Check to ensure there is no empty object in the security field.